


MIA3001

ROLLING SHUTTER CMOS IMAGE SENSOR

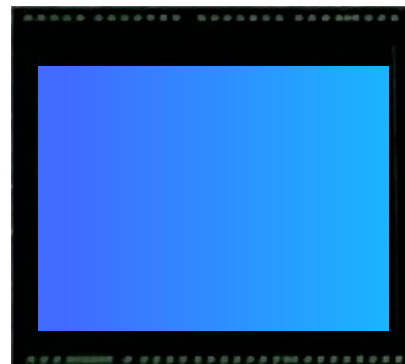

产品介绍 CHIEF APPLICATION

MIA3001 is a 1/2.4 inch 3 million pixel full HD CMOS image sensor chip, the effective pixel array is 1936 × 1552 chip to support the front mounted HD around, around applications. The MIA3001 features DCG+VS exposure, external synchronous trigger support, on-chip temperature sensor, excellent dark environment imaging capabilities, and flexible, rich configuration features.

规格说明 Specification

项目 Item	参数 Item
Activ Array Size	1936(H)×1552(V)
Pixel Size	3.0um x 3.0um
Lens Size	1/2.4Inch
TEMP Range Operation	-40~+125°C
Output Format	RAW10/12/16/20
Sensitivity	8.78 V/lux.s
Dynamic Range	120dB
SNR Max	43dB
ACE Q100	Grade-2

应用场景 Application Scenarios

- 车载高清周视系统
Car HD perivision system
- 车载高清环视系统
Car HD viewing system

产品特性 Product Feature

- 暗环境成像
Dark Environment imaging
- DCG HDR
DCG HDR
- 高信噪比
High SNR
- 图像预处理
Image Preprocessing



■ **Chengdu Office** (Product Center - Headquarters)
9-10F, Unit B6-2, AI International Hub, 171# Hele 2nd street, Hi-Tech District, Chengdu, P.R.China
TEL: 028-68669333 WEB: www.imgds.com
E-mail: imgds@imagedesign.com

■ **Shanghai Office** (R&D Center)
497 Gaosi Road, Zhagjiang High Tech Park, Pudong New Area, Shanghai

■ **Shenzhen Office** (Support Center)
3F, tower t2-a, Shenzhen Software Park, No. 22, gaoxinnan 7th Road, Nanshan District, Shenzhen