


MIS80W1

ROLLING SHUTTER CMOS IMAGE SENSOR

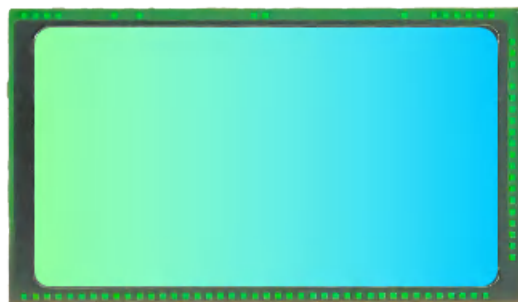

产品介绍 CHIEF APPLICATION

The MIS80W1 chip is an image sensor product designed for low-power scenarios (battery-powered or continuously-powered) in the security and surveillance market. Fabricated with advanced BSI technology, it supports 60fps full HD imaging at 8-megapixel resolution. Beyond conventional image sensor features like linear exposure, DOL2, and multi-chip synchronization, this chip integrates an on-board digital ISP and lightweight AI engine. This enables emerging capabilities such as FastAE and ultra-low-power wake-up functionality. Primary applications include but are not limited to: smart doorbells/locks, Face ID panels, consumer-grade IP cameras, dashcams, and video conferencing systems.

规格说明 Specification

项目 Item	参数 Item
Activ Array Size	3840 (H) * 2160 (V)
Pixel Size	1.45um*1.45um
Lens Size	1/2.8 Inch
TEMP Range Operation	-40~85°C
Output Format	RAW10/RAW12
Frame rate	4K 60fps
Dynamic Range	77.4dB
SNR 1s	0.87 lux
QE	75%@520nm 35%@850nm

应用场景 Application Scenarios

- 安防监控
Security Monitoring
- 低功耗Camera
Low-power Camera
- 车载摄像头
Vehicle-mounted Camera
- 视频会议
Video Conference

产品特性 Product Feature

- AOV
AOV
- 近端智能AI
Near-end intelligent Ai
- 低功耗
Low Power consumption
- 高动态范围
High Dynamic range



■ **Chengdu Office** (Product Center - Headquarters)
9-10F, Unit B6-2, AI International Hub, 171# Hele 2nd street, Hi-Tech District, Chengdu, P.R.China
TEL: 028-68669333 WEB: www.imgds.com
E-mail: imgds@imagedesign.com

■ **Shanghai Office** (R&D Center)
497 Gaosi Road, Zhagjiang High Tech Park, Pudong New Area, Shanghai

■ **Shenzhen Office** (Support Center)
3F, tower t2-a, Shenzhen Software Park, No. 22, gaioxinnan 7th Road, Nanshan District, Shenzhen