


MIS2009

ROLLING SHUTTER CMOS IMAGE SENSOR

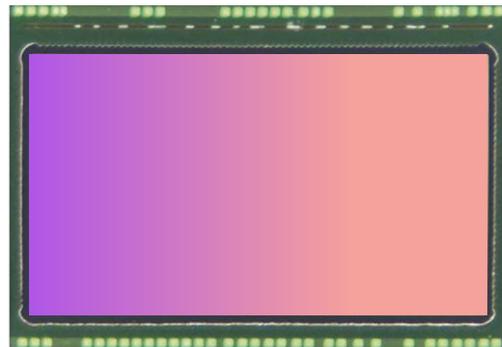

产品介绍 CHIEF APPLICATION

MIS2009 is a 1/2.9 inch 2-megapixel full HD CMOS image sensor chip, the effective pixel array is 1936X1096, the chip supports high frame rate applications under full HD. MIS2009 has linear exposure mode to support multi-chip synchronization function, excellent dark environment imaging capability and flexible, rich configuration functions.

规格说明 Specification

项目 Item	参数 Parameters
Active Array Size	1936(H)*1096(V)
Pixel Size	2.79um x 2.79um
Lens Size	1/2.9Inch
TEMP Range Operation	-40~85°C
Output Format	RAW10, RAW12
Sensitivity	5.62V/lux.s
Dynamic Range	71dB
SNR Max	37dB

应用场景 Application Scenarios

- 安防监控类 Security Monitoring calss
- 消费类视频产品 Consumer Video products
- 1080P60视频应用 1080P60 Video Application

产品特性 Product Feature

- 暗环境成像 Dark Environment imaging
- 图像预处理 Image Preprocessing
- 低功耗 Low Power consumption
- 高帧率 High Frame rate



■ **Chengdu Office** (Product Center - Headquarters)
9-10F, Unit B6-2, AI International Hub, 171# Hele 2nd street, Hi-Tech District, Chengdu, P.R.China
TEL: 028-68669333 WEB: www.imgds.com
E-mail: imgds@imagedesign.com

■ **Shanghai Office** (R&D Center)
497 Gaosi Road, Zhagjiang High Tech Park, Pudong New Area, Shanghai

■ **Shenzhen Office** (Support Center)
3F, tower t2-a, Shenzhen Software Park, No. 22, gaoxinnan 7th Road, Nanshan District, Shenzhen